



PASSWORD DATABASE							
1	2	3	4	5	6	7	8
1	4	1	4	2	1	3	5

FIG. 4

```

<APPLET CODE="HTTP://machineB/pict.class" width="100" height="100">
<PARAM name="ID" value="pict1">
<PARAM name="CGI" value="HTTP://machineB/pict.cgi">
</APPLET>

```

FIG. 5

```

http://machineB/pict.cgi?passwd=12345678&URI="HTTP://machineA/index.html"
&ID=pict1

```

FIG. 6

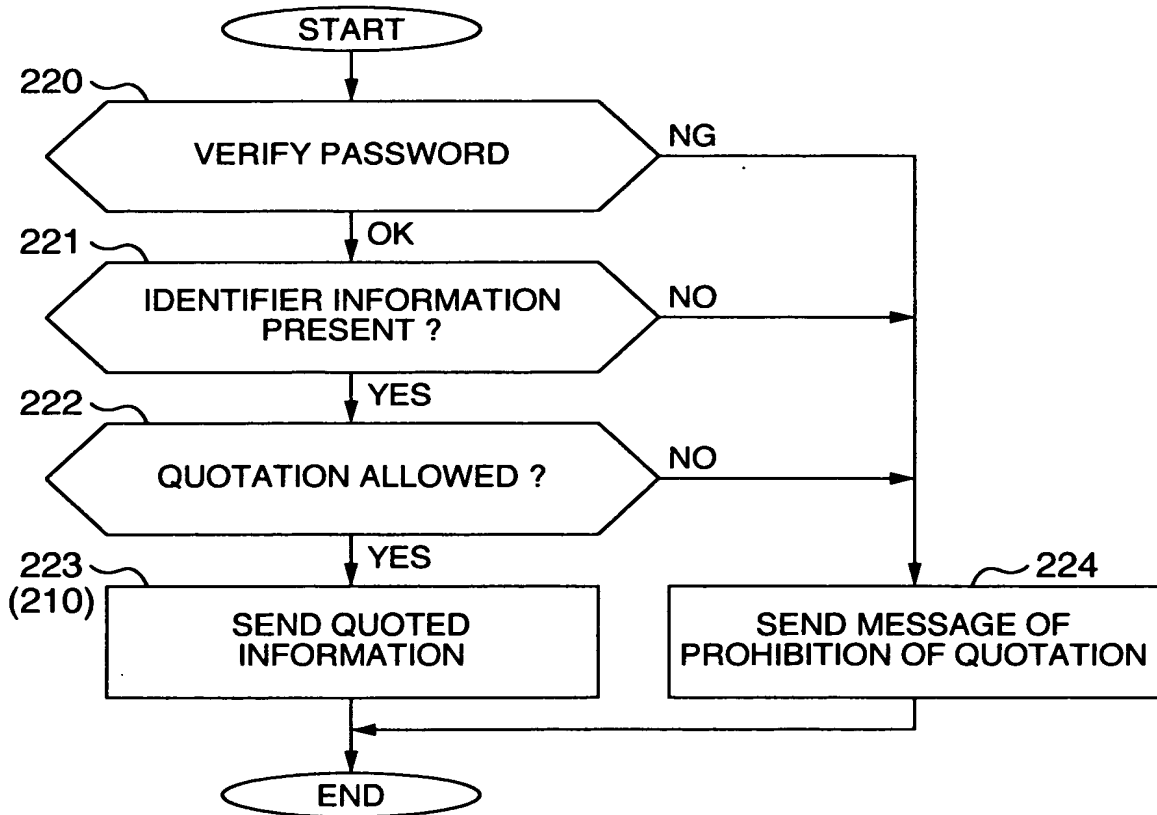


FIG. 10

1 0 1 1 1 1 0 0
1 0 0 1 0 1 1 1

ENCRIPTION KEY DATABASE

FIG. 11

[http://machineB/pict.cgi?URI="HTTP://machineA/index.html"&ID=pict1](http://machineB/pict.cgi?URI=)

FIG. 12

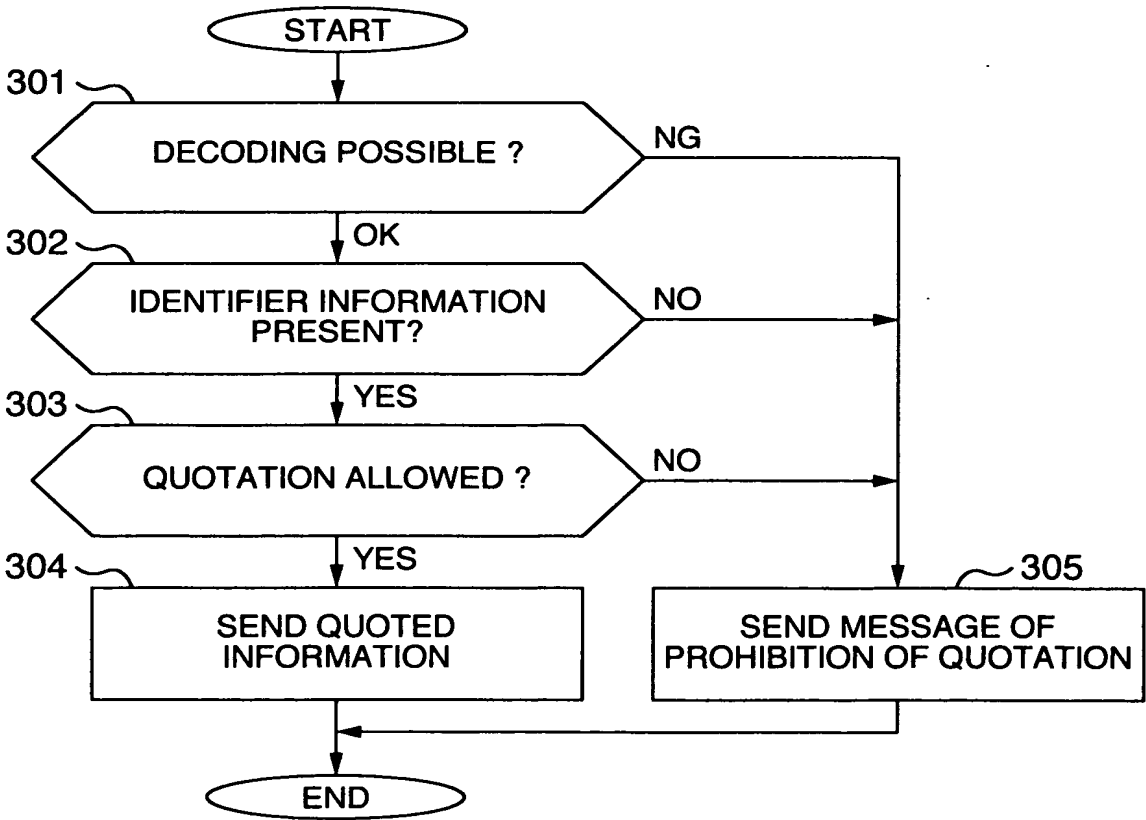


FIG. 13

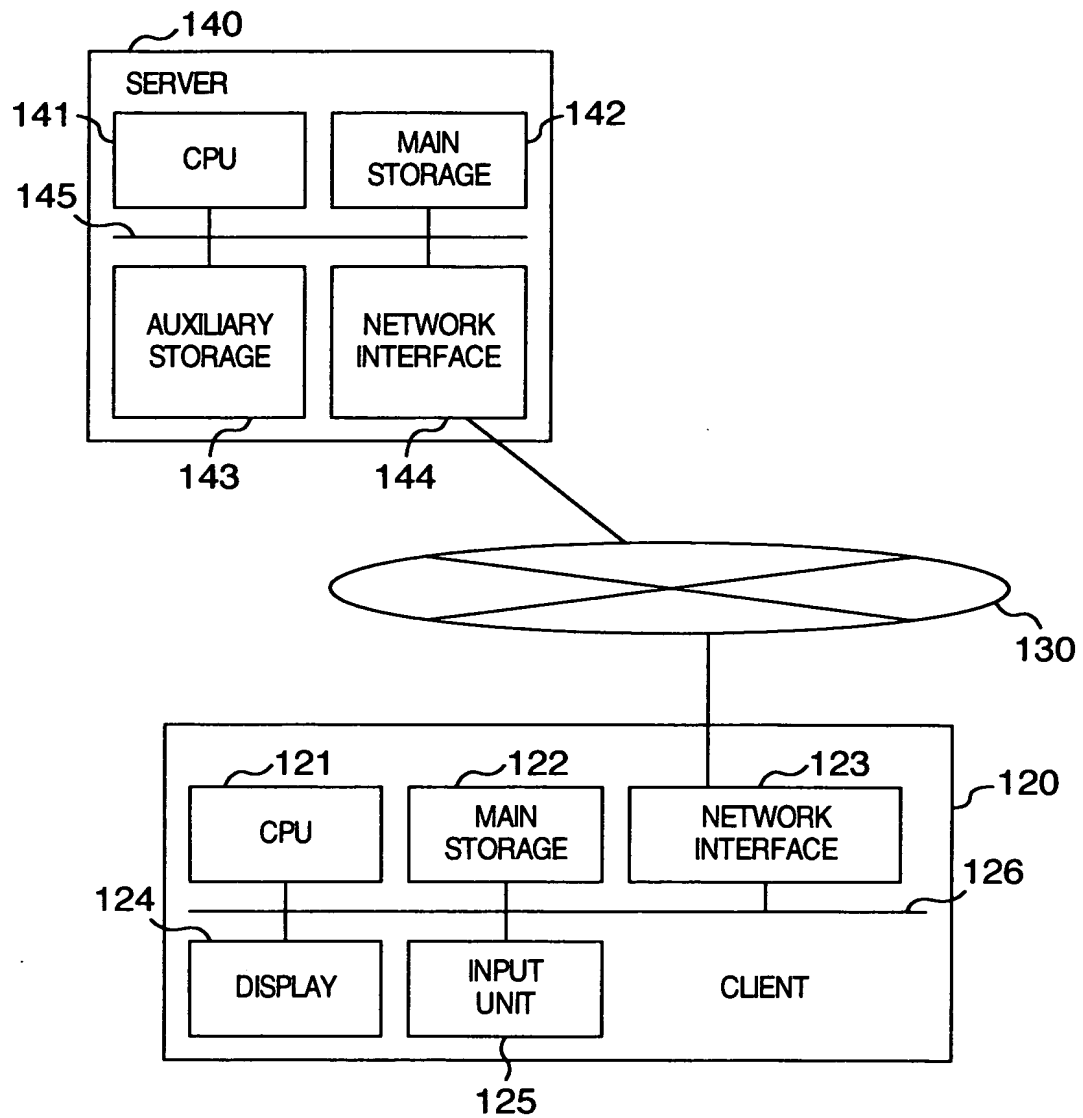


FIG. 15A

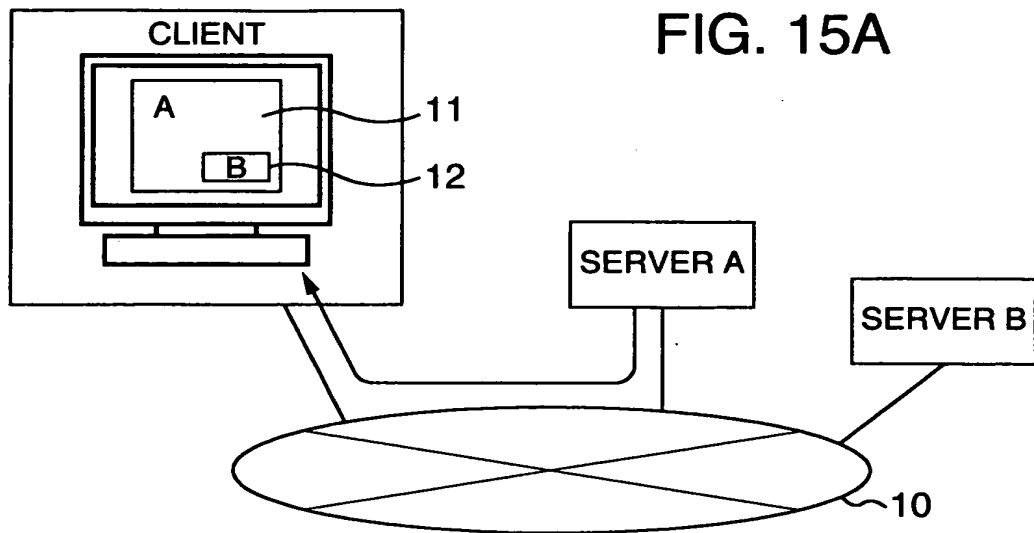


FIG. 15B

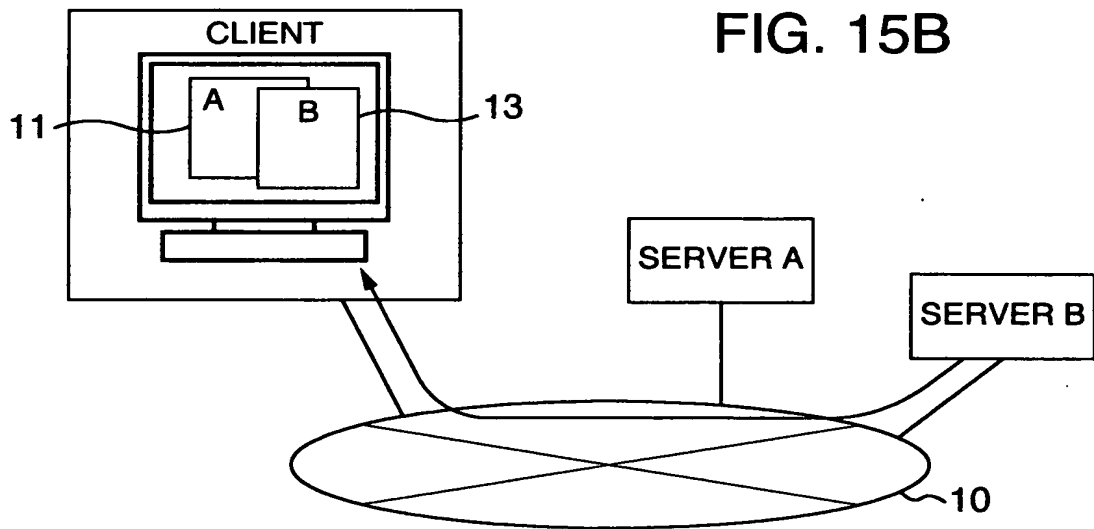


FIG. 15C

